


OMEGA XS RECESSED

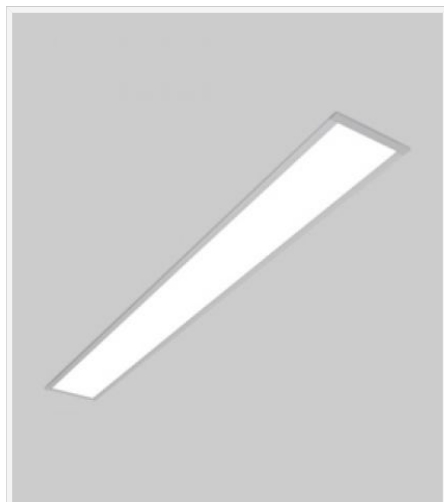

BESCHRIJVING

Merk - Marque:

Climar

Materiaal - Matériaux:

Extruded Aluminium

Type:

Inbouw vast / Encastré fixe

Afmetingen armatuur - Dimensions armature:

86x96xC mm
C = 845mm / C = 1126mm
C = 1407mm / C = 2250mm
C = 2812mm / Corner = 615x615mm

Kleur - Couleur:

Matt White / Matt Anodized

Diffuser - Diffuseur:

Opal / Micro Prismatic

Uitrusting - Equipement:

LED

Systeemvermogen - Puissance de système:


C = 845mm - 19W & 38W
C = 1126mm - 25W & 50W
C = 1407mm - 31W & 63W
C = 2250mm - 50W & 101W
C = 2812mm - 63W & 126W
Corner - 25W & 50W

Kelvin graden - Degré Kelvin:

3000°K / 4000°K

Lumen:	<p>Opal:</p> <p>C = 845mm</p> <p>19W: 1888lm (3000 °K) / 1976lm (4000°K)</p> <p>38W: 3776lm (3000 °K) / 3951lm (4000°K)</p> <p>C = 1126mm</p> <p>25W: 2517lm (3000 °K) / 2634lm (4000°K)</p> <p>50W: 5035lm (3000 °K) / 5268lm (4000°K)</p> <p>C = 1407mm</p> <p>31W: 3146lm (3000 °K) / 3293lm (4000°K)</p> <p>63W: 6293lm (3000 °K) / 6585lm (4000°K)</p> <p>C = 2250mm</p> <p>50W: 5034lm (3000 °K) / 5268lm (4000°K)</p> <p>101W: 10070lm (3000 °K) / 10536lm (4000°K)</p> <p>C = 2812mm</p> <p>63W: 6293lm (3000 °K) / 6586lm (4000°K)</p> <p>126W: 12587lm (3000 °K) / 13170lm (4000°K)</p> <p>Corner:</p> <p>60W: 2517lm (3000 °K) / 2634lm (4000°K)</p> <p>118W: 5035lm (3000 °K) / 5266lm (4000°K)</p> <p>Micro Prismatic:</p> <p>C = 845mm</p> <p>19W: 1422lm (3000 °K) / 1488lm (4000°K)</p> <p>38W: 2843lm (3000 °K) / 2975lm (4000°K)</p> <p>C = 1126mm</p> <p>25W: 1895lm (3000 °K) / 1983lm (4000°K)</p> <p>50W: 3791lm (3000 °K) / 3967lm (4000°K)</p> <p>C = 1407mm</p> <p>31W: 2369lm (3000 °K) / 2480lm (4000°K)</p> <p>63W: 4739lm (3000 °K) / 4959lm (4000°K)</p> <p>C = 2250mm</p> <p>50W: 3790lm (3000 °K) / 3967lm (4000°K)</p> <p>101W: 7583lm (3000 °K) / 7934lm (4000°K)</p> <p>C = 2812mm</p> <p>63W: 4739lm (3000 °K) / 4959lm (4000°K)</p> <p>126W: 9478lm (3000 °K) / 9917lm (4000°K)</p> <p>Corner:</p> <p>60W: 1895lm (3000 °K) / 1983lm (4000°K)</p> <p>118W: 3791lm (3000 °K) / 3967lm (4000°K)</p>
RA - CRI:	>80
Afkoeling - Refroidissement:	Passief - Passif
Voeding - Alimentation:	230V / 50Hz
Bescherming - Protection:	IP20 / IP43 (Optic) / IK05
Norm - Norme:	CE EN60598-1
CIE fluxcode:	Op aanvraag - Sur demande
Optie - Option	<p>DALI / Push / DSI / DIM 1-10V/ Phase-cut</p> <p>Turnable White / RGB / RGBW</p> <p>Emergency: 1 Hour / 3 Hours / DALI 1 Hour / 3 Hours</p> <p>Sensor: Motion sensor / Ambient Light / Motion & Ambient Light</p> <p>CRI>90</p> <p>Bluetooth Control System</p> <p>2700K / 5000°K / 6500°K</p>

TECHNISCHE TEKENING

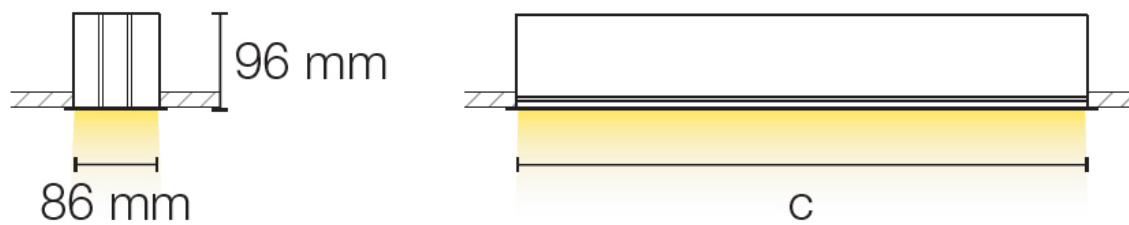

s.a. Be-Lighting Concept n.v.



Rue Communale 44 - 1083 Bruxelles
tel 70: (+32 02/241 09)
fax: (+32 02/426 17 90)

Gemeentestraat 44 - 1083 Brussel
info@be-lightingconcept.be
www.be-lightingconcept.be