


LOG OUT 2 SD

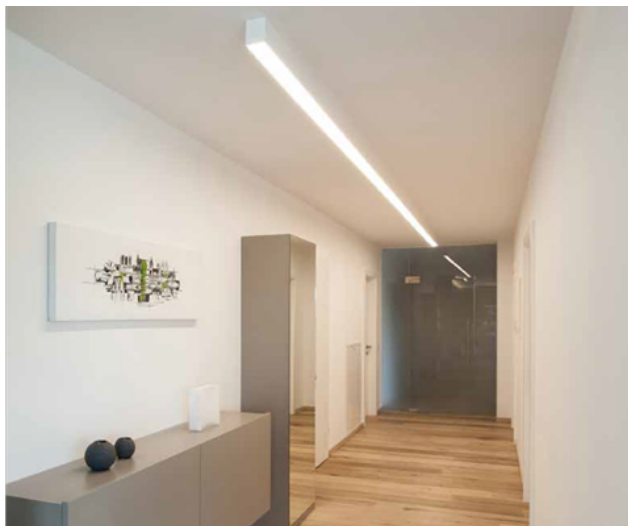

BESCHRIJVING

Merk - Marque:	Tecnico
Materiaal - Matériaux:	Extruded Aluminium
Type:	Opbouw / Apparent
Afmetingen armatuur - Dimensions armature:	76x90xLmm
Kleur - Couleur:	Zwart-Noir / Wit-Blanc / Aluminium Anodized
Diffuser - Diffuseur	PMMA Opaal - PMMA Opal (pm) / Microprismatisch - Microprismatique (mp)
Uitrusting - Equipement:	LED
Systemvermogen - Puissance de système:	High Efficiency 16W (L= 853 mm) / 20W (L= 1134 mm) / 25W (L= 1415 mm) / 40W (L= 2259 mm) / 50W (L= 2821 mm) / 60W (L= 3383 mm) / 75W (L= 4226 mm) High Output 30W (L= 853 mm) / 41W (L= 1134 mm) / 51W (L= 1415 mm) / 82W (L= 2259 mm) / 102W (L= 2821 mm) / 123W (L= 3383 mm) / 153W (L= 4226 mm)
Kelvin graden - Degré Kelvin:	3000°K / 4000°K

	<p>High Efficiency</p> <p>16W: 1390 lm (3000°K-mp), 1460 lm (4000°K-mp), 1490 lm (3000°K-pm), 1560 lm (4000°K-pm)</p> <p>20W: 1860 lm (3000°K-mp), 1950 lm (4000°K-mp), 1990 lm (3000°K-pm), 2090 lm (4000°K-pm)</p> <p>25W: 2320 lm (3000°K-mp), 2440 lm (4000°K-mp), 2490 lm (3000°K-pm), 2610 lm (4000°K-pm)</p> <p>40W: 3720 lm (3000°K-mp), 3900 lm (4000°K-mp), 3980 lm (3000°K-pm), 4180 lm (4000°K-pm)</p> <p>50W: 4640 lm (3000°K-mp), 4880 lm (4000°K-mp), 4980 lm (3000°K-pm), 5220 lm (4000°K-pm)</p> <p>60W: 5580 lm (3000°K-mp), 5850 lm (4000°K-mp), 5970 lm (3000°K-pm), 6270 lm (4000°K-pm)</p> <p>75W: 6960 lm (3000°K-mp), 7320 lm (4000°K-mp), 7470 lm (3000°K-pm), 7830 lm (4000°K-pm)</p>
Lumen:	<p>High Output</p> <p>30W: 2580 lm (3000°K-mp), 2700 lm (4000°K-mp), 2760 lm (3000°K-pm), 2900 lm (4000°K-pm)</p> <p>41W: 3440 lm (3000°K-mp), 3610 lm (4000°K-mp), 3690 lm (3000°K-pm), 3860 lm (4000°K-pm)</p> <p>51W: 4300 lm (3000°K-mp), 4510 lm (4000°K-mp), 4610 lm (3000°K-pm), 4830 lm (4000°K-pm)</p> <p>82W: 6880 lm (3000°K-mp), 7220 lm (4000°K-mp), 7380 lm (3000°K-pm), 7720 lm (4000°K-pm)</p> <p>102W: 8600 lm (3000°K-mp), 9020 lm (4000°K-mp), 9220 lm (3000°K-pm), 9660 lm (4000°K-pm)</p> <p>123W: 10320 lm (3000°K-mp), 10830 lm (4000°K-mp), 11070 lm (3000°K-pm), 11580 lm (4000°K-pm)</p> <p>153W: 12900 lm (3000°K-mp), 13530 lm (4000°K-mp), 13830 lm (3000°K-pm), 14490 lm (4000°K-pm)</p>
RA - CRI:	>80
Afkoeling - Refroidissement:	Passief - Passif
Voorschakelapp - Ballast:	LED driver (Inclu.)
Voeding - Alimentation:	220-240V / 50-60Hz
Bescherming - Protection:	IP20
Norm - Norme:	CE EN60598-1
CIE fluxcode:	Op aanvraag - Sur demande
Optie - Option	Analog Dim 1-10V / DALI / Push

TECHNISCHE TEKENING



s.a. Be-Lighting Concept n.v.



Rue Communale 44 - 1083 Bruxelles
tel 70: (+32 02/241 09)
fax: (+32 02/426 17 90)

Gemeentestraat 44 - 1083 Brussel
info@be-lightingconcept.be
www.be-lightingconcept.be