


# TUPOLI-V 70 SUSPENDED

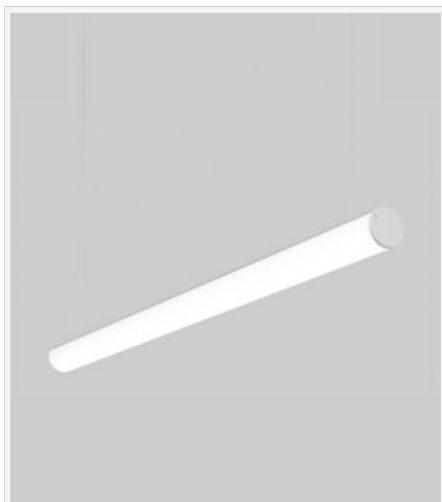


## BESCHRIJVING

Merk - Marque:	Climar
Type:	Pendel / Suspension
Afmetingen armatuur - Dimensions armature:	Ø70xCmm C = 868mm / C = 1149mm C = 1430mm / C = 2273mm C = 2835mm
Diffuser - Diffuseur:	Opal PMMA
Uitrusting - Equipement:	LED
Systeemvermogen - Puissance de système:	C = 868mm - 19W / 38W C = 1149mm - 25W / 50W C = 1430mm - 31W / 63W C = 2273mm - 50W / 101W C = 2835mm - 63W / 126W
Kelvin graden - Degré Kelvin:	3000°K / 4000°K
Lumen:	C = 868mm 19W: 2177lm (3000 °K) / 2278lm (4000°K) 38W: 4353lm (3000 °K) / 4555lm (4000°K) C = 1149mm 25W: 2901lm (3000 °K) / 3037lm (4000°K) 50W: 5805lm (3000 °K) / 6073lm (4000°K) C = 1430mm 31W: 3627lm (3000 °K) / 3796lm (4000°K) 63W: 7255lm (3000 °K) / 7591lm (4000°K) C = 2273mm 50W: 5803lm (3000 °K) / 6073lm (4000°K) 101W: 11609lm (3000 °K) / 12146lm (4000°K) C = 2835mm 63W: 7254lm (3000 °K) / 7592lm (4000°K) 126W: 14511lm (3000 °K) / 15183lm (4000°K)
RA - CRI:	>80
Afkoeling - Refroidissement:	Passief - Passif

Voorschakelapp - Ballast:	LED driver
Voeding - Alimentation:	230V / 50Hz
Bescherming - Protection:	IP40 / IK08
Norm - Norme:	CE EN60598-1
CIE fluxcode:	Op aanvraag - Sur demande
	DALI / Push / DSI / DIM 1-10V / Phase-cut
	Turnable White / RGB / RGBW
	Emergency: 1 Hour / 3 Hours / DALI 1 Hour / 3 Hours
Optie - Option	Sensor: Motion sensor / Ambient Light / Motion & Ambient Light
	CRI>90
	Bluetooth Control System
	2700°K / 5000°K / 6500°K

## TECHNISCHE TEKENING

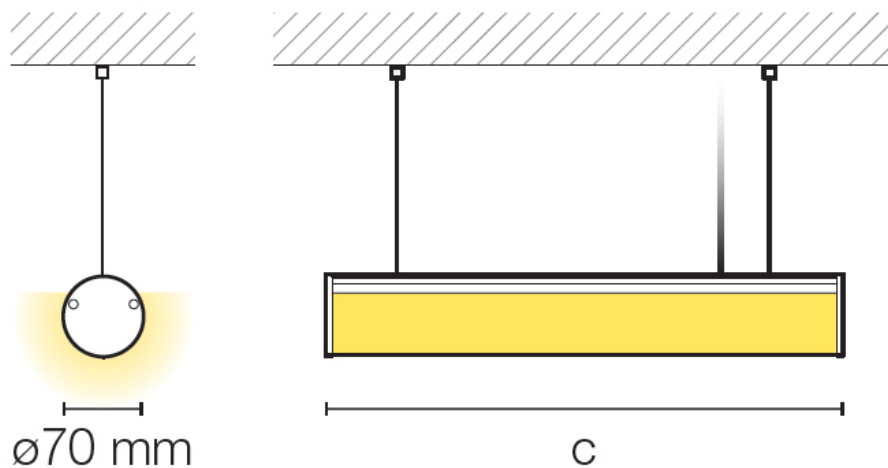

s.a. Be-Lighting Concept n.v.



fax: (+32 02/426 17 90)

[www.be-lightingconcept.be](http://www.be-lightingconcept.be)