


GARDEN 60 FLOOR INTEGRATED DRIVER

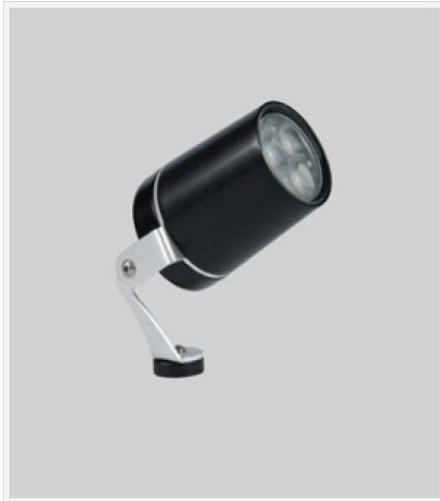


BESCHRIJVING

| | |
|--|--|
| Merk - Marque: | Climar |
| Materiaal - Matériaux: | Aluminium Anti-corrosion surface treatment |
| Type: | Opbouw Richbaar 110° - 360° / Apparent Orientable 110° - 360° |
| Afmetingen armatuur - Dimensions armature: | Ø60x97mm |
| Kleur - Couleur: | RAL 9005 Matt Black |
| Bundel - Faisceau: | 12° / 35° / 48° |
| Diffuser - Diffuseur | PMMA |
| Diffuser - Diffuseur | Clear Tempered Glass |
| Uitrusting - Equipement: | LED |
| Systeemvermogen - Puissance de système: | 4W / 8W |
| Kelvin graden - Degré Kelvin: | 3000°K / 4000°K |
| Lumen: | - 3000°K 4W: 344lm (12°) / 342lm (35°) / 322lm (48°) 8W: 610lm (12°) / 602lm (35°) / 567lm (48°) |
| RA - CRI: | - 4000°K 4W: 431lm (12°) / 428lm (35°) / 403lm (48°) 8W: 762lm (12°) / 752lm (35°) / 709lm (48°) |
| Voorschakelapp - Ballast: | >80 |
| | Integrated LED driver |

| | |
|---------------------------|--|
| Voeding - Alimentation: | 230V 50Hz |
| Bescherming - Protection: | IP65 / IK08 |
| Norm - Norme: | CE EN60598-1 |
| CIE fluxcode: | Op aanvraag - Sur demande |
| Optie - Option | Push RA-CRI: 2700°K / 5000°K / 6500°K Glare Control Filter Lateral Glare Control Cylindrical Shield |

TECHNISCHE TEKENING

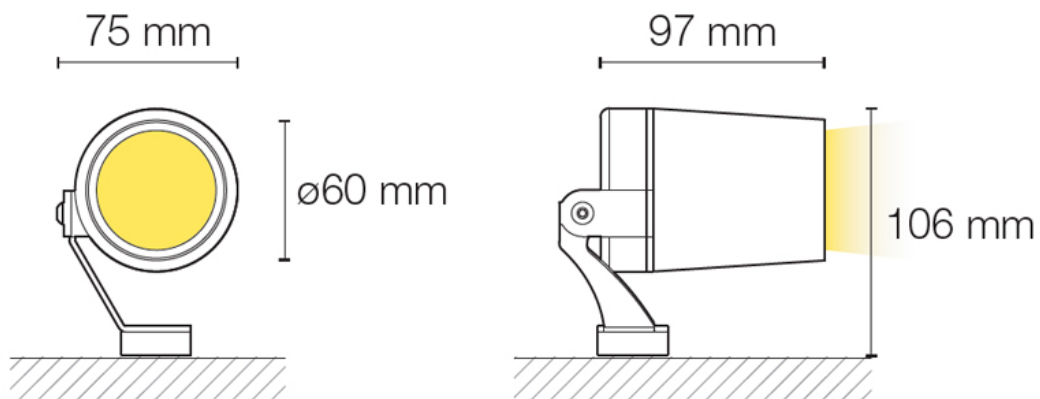

s.a. Be-Lighting Concept n.v.



Rue Communale 44 - 1083 Bruxelles
tel 70: (+32 02/241 09)
fax: (+32 02/426 17 90)

Gemeentestraat 44 - 1083 Brussel
info@be-lightingconcept.be
www.be-lightingconcept.be